


Gaska Tape and HVAC



ESL Series, F Series, V Series

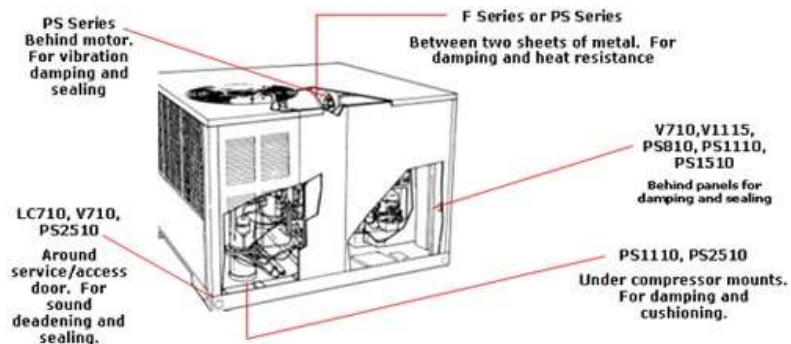

V1526SA-EC
Used for glazing glass doors.
Replaces high density
urethane

V1526SA



V612FR VYN-ALUM

Used between range and wall. Meets UL-723 building materials specification. Exceeds 25/50 flame and smoke spread index.

V612FR VYN-ALUM



Seal around perimeter of HVAC housing unit

LDGY or LDBK